


PA AMIX54Z

Matrix/Mixer 5 Line/Mic Input 4 Zones with media player

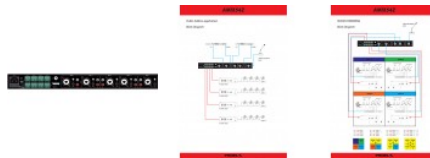

Description

AMIX54Z is a Stereo Matrix/Mixer provided with 5 line/micro inputs with selectable Phantom + 48V. Each input is freely assigned to one zone or group of zones. Input 1 is also equipped with a priority function over all other inputs. The said function can be inserted by means of a comfortable button located on the front panel.

Each input has volume control located on the front panel and a sensitivity level control situated on the rear panel, which, together with the XLR COMBO connector and two RCAs (STEREO) enable connection to any sound source, whether it is a line or micro level, to this device.

AMIX54Z is provided with 4 Stereo zone outputs on Eurobloc terminals. Each output has its own volume control and thus guarantees perfect volume balancing with any audio source set-up connected.

By means of the rear dipswitch, each output can be set to MONO or STEREO, thus making the device extremely versatile with PA applications only as well as with entertaining applications.

The MP3 MULTIMEDIA PLAYER with built-in FM radio (87.5/108.0 MHz), freely addressable on output zones makes this product complete in all respects, and extremely beneficial with most applications.

MAIN FUNCTIONS:

- o Five mic/line inputs on balanced COMBO and RCA Stereo
- o Independent gain control on input channels 1~5 by means of the rear trimmer
- o Phantom +48V that can be deselected with each input
- o Led CLIP indicator for each channel input
- o INPUT1 priority function on other inputs that can be disabled
- o Dipswitch (INPUT1~5) to assign the input to outputs
- o Independent volume control (INPUT1~5)
- o Four balanced outputs/stereo zones on Eurobloc terminals
- o Four signal presence indicators on the outputs
- o Stereo/Mono selector on each output
- o Independent volume control on the four zone outputs
- o MP3 multimedia player with FM radio freely addressable on the output zones
- o Ground Lift
- o Power supply selector 230/117Vca



o 2 U-shaped fins to fasten to a 19" rack

Technical Specifications PA AMIX54Z

Model: AMIX54Z

INPUT CH1~CH5

Phantom power: +48 V DC

MIC/Line XLR input: Electronically Balanced

Gain: -20 dB to -41dB

Max. Input: -1.5/-22.5dBu (line/mic)

S/N: 80dB

Sensitivity: -18dBu

RCA Line Input: Stereo unbalanced

Line Max. Input: -4.5dBu

S/N: ≥ 75 dB

Line Input: Unbalanced

Sensitivity: -21dBu

Frequency Response: 20Hz-22KHz +/-3dB

T.H.D.:

